


Newton System
100 Deck
Waterproofing
systems are
available for the
waterproofing of
the deck.

Newton System
300 waterbar at
construction joints

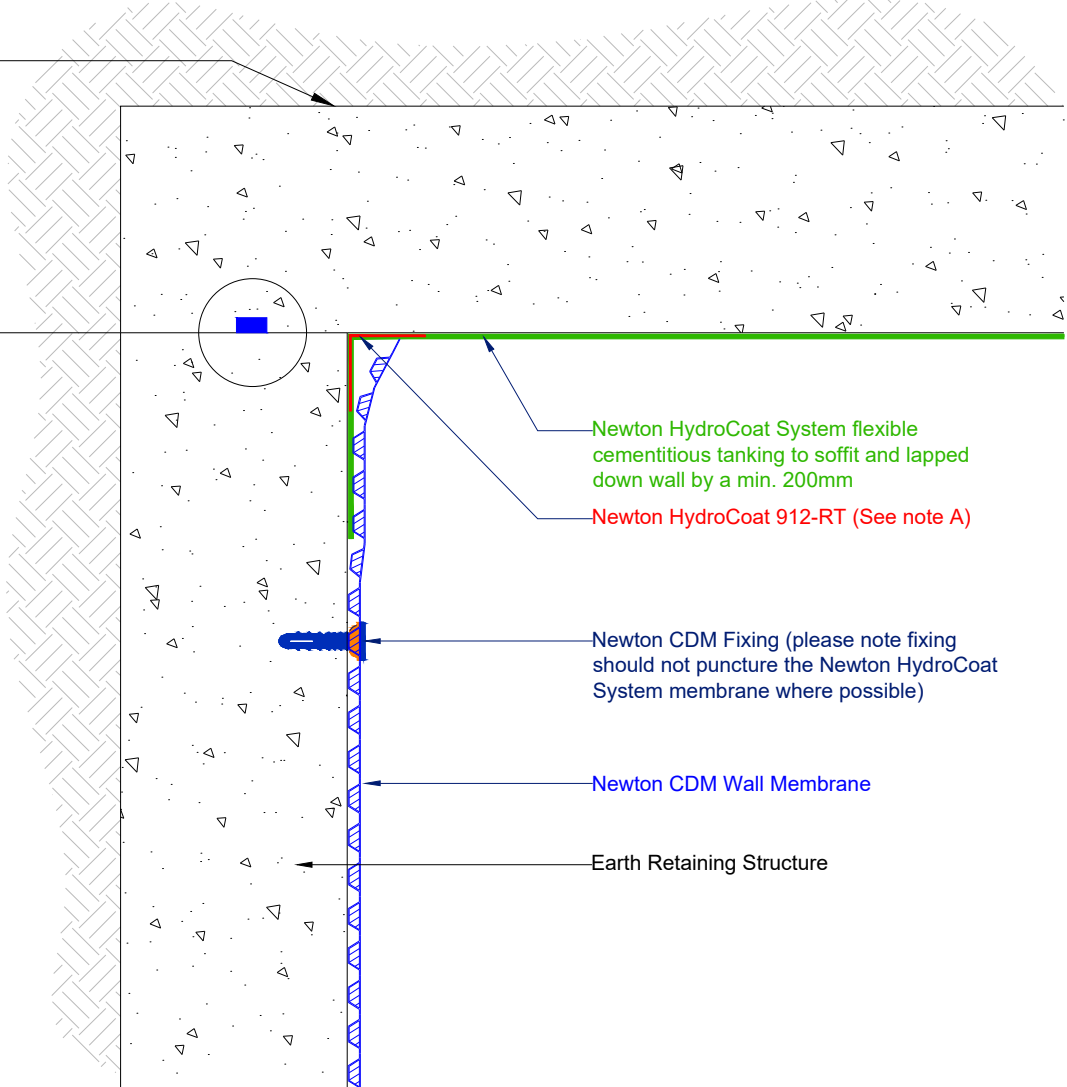

Newton HydroCoat System flexible
cementitious tanking to soffit and lapped
down wall by a min. 200mm

Newton HydroCoat 912-RT (See note A)

Newton CDM Fixing (please note fixing
should not puncture the Newton HydroCoat
System membrane where possible)

Newton CDM Wall Membrane

Earth Retaining Structure

This detail should be used in conjunction with a
Newton CDM System waterproofing drawing.

A) Reinforce the Wall/Soffit junction with
Newton HydroCoat 912-RT. Please see Drawing
CW-D01 for further information.
If severe movement or vibration is expected
please use detail CDM-D10B.

To access further details and relevant technical information please call our Technical Team on 01732 360 095 or refer to our [website](#).

NOTE: This is a Newton waterproofing detail and copyright remains with John Newton & Co. Ltd. (trading as Newton Waterproofing Systems). Any specification/advice provided is only valid if used with products supplied by John Newton & Co. Ltd. For the design of the structure, please use a professional designer. We recommend that Newtons' waterproofing systems are installed by our NSBC registered contractors who can offer insurance backed guarantees and accept liability for both the design and installation of our systems. Please refer to product data sheets before installation of our products.

Newton Waterproofing Systems reserve the right to update drawings and product literature at any time.