


Plan or Section

DO NOT SCALE

Notes

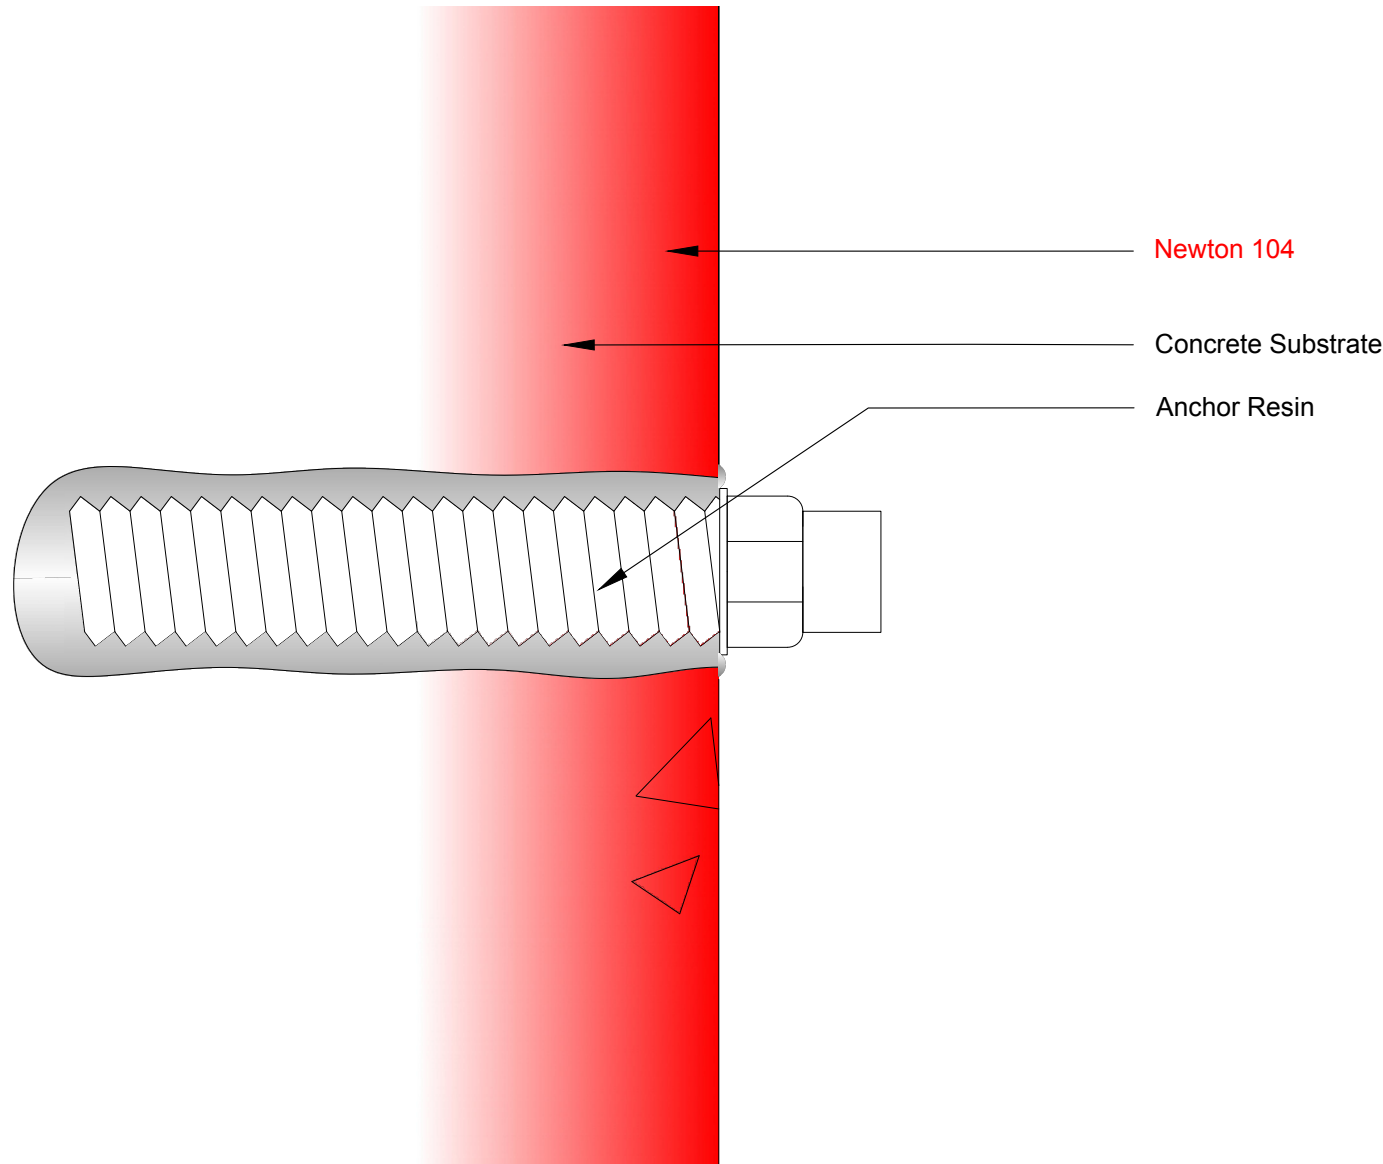

This drawing shows a method of fixing points through a concrete substrate waterproofed with Newton 104.

Fixing directly to the wall, through the waterproof coating, will breach the membrane. The method outlined below will provide a fixing that is self sealing as long as the resin exudes out to the surface when the fixing is inserted.

Drill appropriate sized hole as required; blow out all debris and then insert resin capsule followed by anchor bolt as per manufacturers instructions.

To access further details and relevant technical information please call our Technical Team on 01732 360095 or refer to our [website](#).

Newton HydroSeal System

Fixing point - 104

NOTE: This is a Newton waterproofing detail and copyright remains with John Newton & Co. Ltd. (trading as Newton Waterproofing Systems). Any specification/advice provided is only valid if used with products supplied by John Newton & Co. Ltd. For the design of the structure, please use a professional designer. We recommend that Newtons' waterproofing systems are installed by our NSBC registered contractors who can offer insurance backed guarantees and accept liability for both the design and installation of our systems. Please refer to product data sheets before installation of our products. Newton Waterproofing Systems reserve the right to update drawings and product literature at any time.

Scale Not to scale	Drawing Reference CW-D02A	Original Reference	Drawing Revision b
Date 13/06/2017	Designed by DGB	Drawn by AJG	Checked by DGB